Upfitter Interface
Module



An ISO 9001:2015 Registered Company

Upfitter Interface Module®

Programmable CAN Data Access System



- Passive CAN data acquisition
- Eight digital outputs can be programmed as momentary, latching, time-hold, time-delay or flashing
- Outputs are controlled based on the module's configuration created using the InterMotive UIM Programming Utility program
- Simple plug and play connections for CAN data



- FLEXIBLE DESIGN: Saves time, cost and additional components; user interface makes programming output functions as easy as clicking a button
- CONTROL: Multiple inputs can control a single output
- One high true output, seven low true outputs and two low true inputs
- CONVENIENCE: Works with Ford, GM and RAM CAN as well as J1939 to provide real-time chassis data
- Warning LEDs for easy troubleshooting


Product features may vary by make, model or year. See instructions for complete details.



(775) 831-2002

Details



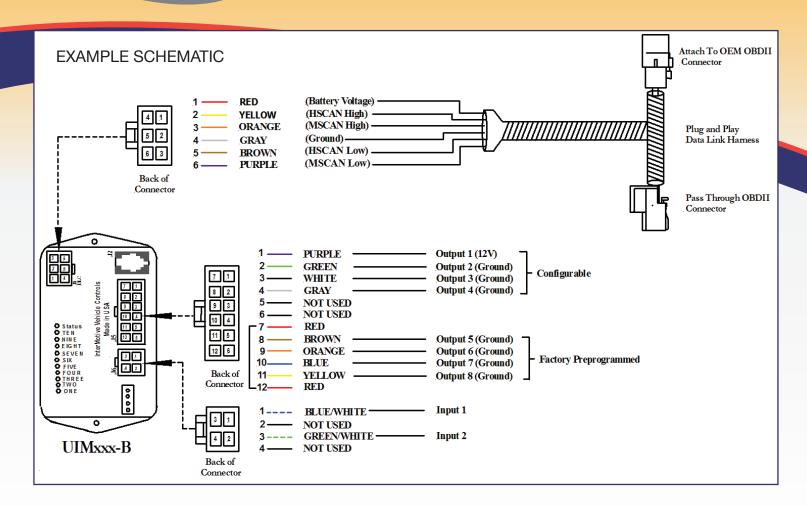

SPECIFICATIONS	
Number of Inputs	Two active low inputs
Number of Outputs	Eight, with one active high
Current Draw	150 mA
Quiescent Draw	< 2 mA (sleep current)
CAN Speed	High and medium speed
Temperature Range	-40°C to 80°C
Dimensions	4" L x 2" W x 1" H

AVAILABLE DATA INCLUDES: (partial list)

- Transmission: Range | Fluid Temperature
- Lights: External Lights* | High and Low Beams | Turn Signals
- Doors: Lock | Unlock | Door Ajar
- Brakes: ABS Event | Park Brake | Service Brakes
- Other: Vehicle Speed | Seatbelt
- Engine/Fuel: Clean Tach Output | Check Engine Light (MIL)** | Coolant and Oil Temp.† | RPM | Engine Running | Ignition Switch Status | Fuel Level | Intake Air Temp. | Throttle Position | Vbat | VSS (2.2 Hz/mph)

^{*} Daytime running lights only work with Ford vehicles

^{**} Check Engine Light Output does not work with RAM vehicles

[†] Oil Temperature only works with Ford vehicles